



Running the WRF Preprocessing System

Michael Duda




Review

- Briefly recall the programs in the WPS

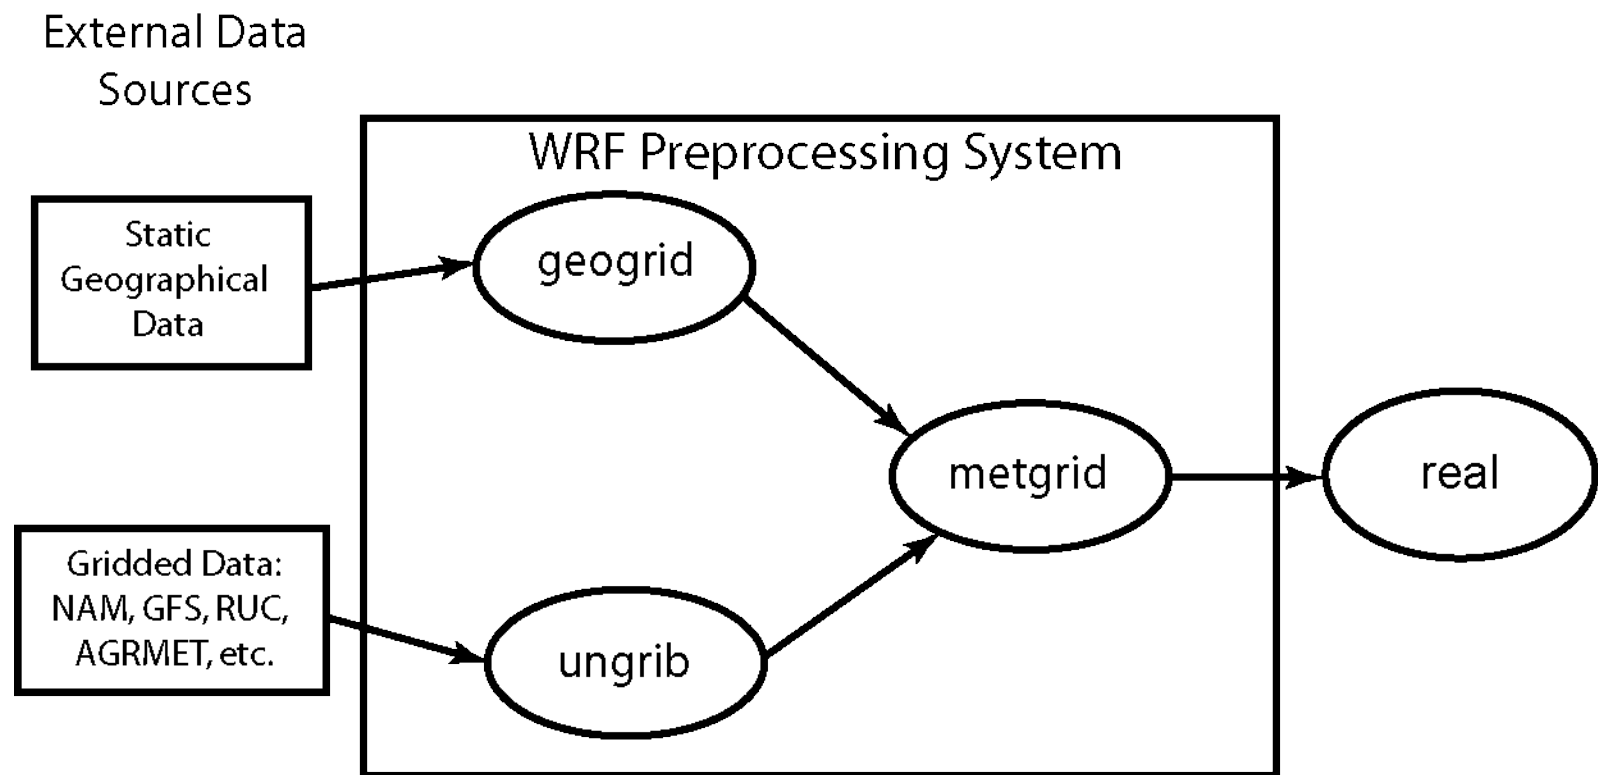


Review

- geogrid (think geographical)
 - Define size/location of model domains and interpolate static terrestrial fields to simulation grids
- ungrib (think un+grib)
 - Extract meteorological fields from GRIB files
- metgrid (think meteorological)
 - Horizontally interpolate meteorological fields (from ungrib) to simulation grids (defined by geogrid)



Overview

- How to run through the WPS for basic cases
 - Basic steps for running WPS
 - Geogrid
 - Ungrib
 - Metgrid
- WPS utility programs
- Common WPS mistakes



Running geogrid

STEP 1: Edit `namelist.wps`

For geogrid, only the `&share` and `&geogrid` namelists need to be edited in `namelist.wps`

`&share`


```
wrf_core = 'ARW',  
max_dom = 2,  
io_form_geogrid = 2,
```

/

`&geogrid`

```
parent_id          = 1, 1,  
parent_grid_ratio  = 1, 3,  
i_parent_start     = 1, 20,  
j_parent_start     = 1, 17,  
e_we               = 220, 181,  
e_sn               = 175, 181,  
geog_data_res      = '5m', '2m',  
dx = 15000,  
dy = 15000,  
map_proj           = 'lambert',  
ref_lat            = 37.0,  
ref_lon            = -97.0,  
truelat1           = 45.0,  
truelat2           = 30.0,  
stand_lon          = -97.0,  
geog_data_path     = '/data/static/geog/'
```

/



Running geogrid

STEP 1: Edit `namelist.wps`

`&share`

```
wrf_core = 'ARW',  
max_dom = 2,  
io_form_geogrid = 2,  
/
```

Which WRF core?


For ARW, set to 'ARW'

For NMM, set to 'NMM'

Total number of model domains,
including nests, for ARW; number
of nesting levels for NMM.

Format for geogrid output files;
2=netCDF is recommended.

See p. 3-8 and 3-31



Running geogrid

STEP 1: Edit `namelist.wps`

&geogrid

```
parent_id           = 1, 1,  
parent_grid_ratio   = 1, 3,  
i_parent_start      = 1, 20,  
j_parent_start      = 1, 17,
```

```
e_we                = 220, 181,  
e_sn                = 175, 181,  
dx = 15000,  
dy = 15000,
```

```
geog_data_res       = '5m', '2m',
```


....

Nesting: Who is the parent
What is the grid ratio for each
nest? Where is it located in
parent?

Domain sizes: How many
points does the domain have
What is the grid spacing?

Static data: What resolution
source data to interpolate from
for each domain?
'30s', '2m', '5m', or '10m'?

See p. 3-9, 3-16, and 3-33



Running geogrid

STEP 1: Edit `namelist.wps`

&geogrid

...

```
map_proj      = 'lambert',  
ref_lat       = 37.0,  
ref_lon       = -97.0,  
truelat1      = 45.0,  
truelat2      = 30.0,  
stand_lon     = -97.0,
```


Map projection: What projection to use? What are the parameters of the projection?

See p. 3-9 and 3-33

```
geog_data_path = '/data/static/geog/'
```

Static data: Where are data directories (e.g., topo_30s) located?

See p. 3-35




Running geogrid

STEP 2: Make sure GEOGRID.TBL is linked to the correct version of GEOGRID.TBL

- There are multiple GEOGRID.TBL files to support multiple dynamical cores in WRF
- GEOGRID.TBL.ARW must be used for ARW
- GEOGRID.TBL.NMM must be used for NMM

```
> ls geogrid/GEOGRID.TBL  
GEOGRID.TBL -> GEOGRID.TBL.ARW
```




Running geogrid

STEP 3: Run geogrid.exe

```
Parsed 11 entries in GEOGRID.TBL
Processing domain 1 of 2
  Processing XLAT and XLONG
  Processing MAPFAC
  Processing F and E
  Processing ROTANG
  Processing LANDUSEF
  Calculating landmask from LANDUSEF
  Processing HGT_M
...
!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!
! Successful completion of geogrid.                                     !
!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!
```

Geogrid processes each domain individually. There will be one section of messages for each domain or nesting level.

As each field is processed, a message will be written to the screen and to the geogrid.log file.




Running geogrid

STEP 4: Check that geogrid ran successfully



If geogrid ran successfully, this message should be printed:

```
!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!  
!   Successful completion of geogrid.           !  
!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!
```

If there was an error, check for an ERROR or WARNING message in the `geogrid.log` file, or for a system error, like “Segmentation fault”.



Running geogrid

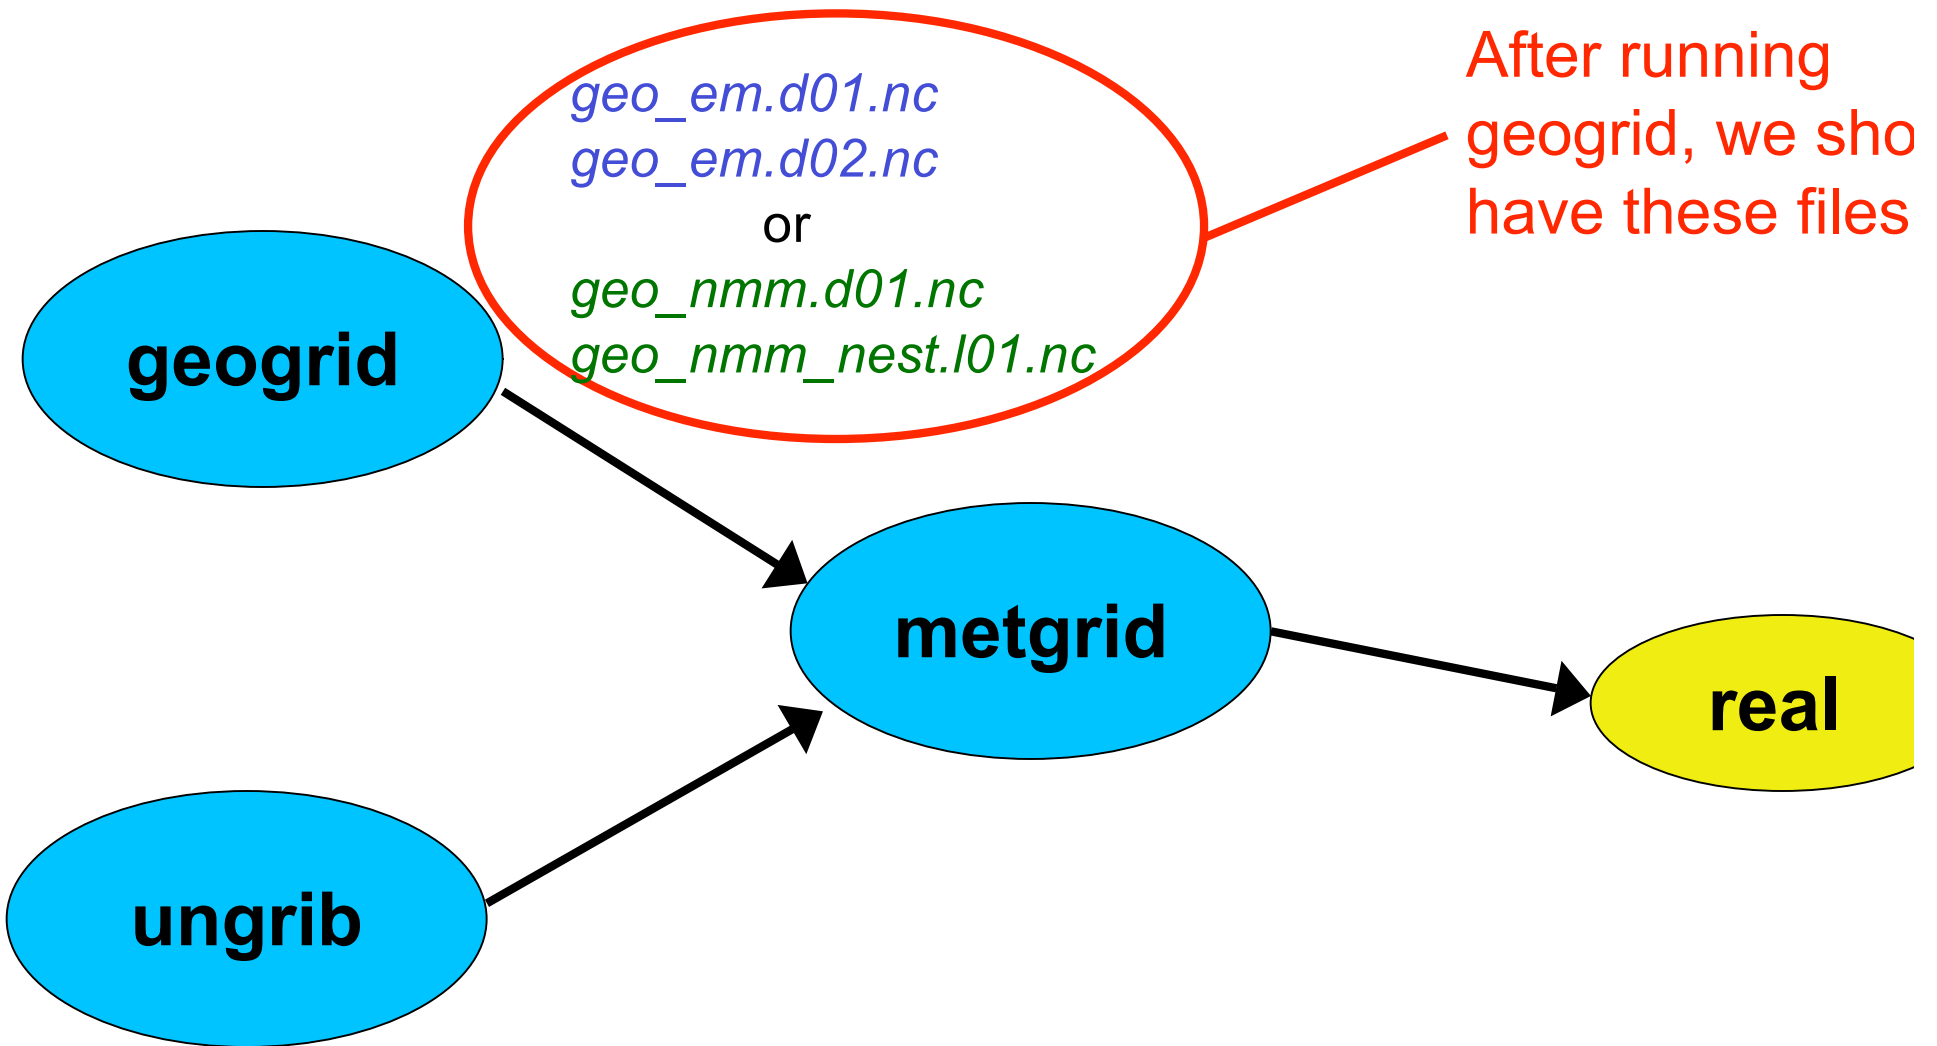

Running ungrib

STEP 1: Edit `namelist.wps`

For ungrib, only the `&share` and `&ungrib` namelists need to be edited

`&share`


```
wrf_core = 'ARW',  
max_dom = 2,  
start_date = '2006-04-01_00:00:00',  
end_date = '2006-04-01_12:00:00',  
interval_seconds = 21600  
io_form_geogrid = 2,
```

/

`&ungrib`

```
out_format = 'WPS',  
prefix = 'GFS',
```

/



Running ungrib

STEP 1: Edit `namelist.wps`

`&share`


```
wrf_core = 'ARW',  
max_dom = 2,
```

```
start_date = '2006-04-01_00:00:00',  
end_date   = '2006-04-01_12:00:00',
```


```
interval_seconds = 21600
```

```
io_form_geogrid = 2,
```

/




Data time range: Between which times should ungrib process GRIB data?

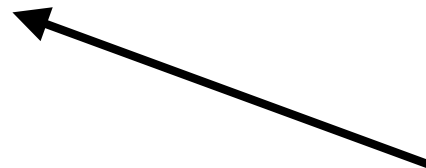

Data frequency: How many seconds between output files for ungrib?
E.g., 10800 s = 3 hrs

See p. 3-11, and 3-32



Running ungrib

STEP 1: Edit `namelist.wps`

`&ungrib`

`out_format = 'WPS',`


`prefix = 'GFS',`

`/`

Intermediate file format: Which format to use for intermediate files? 'WPS', 'SI', or 'MM5' are possible; 'WPS' is recommended.

Intermediate file names: Gives prefix for intermediate files. Prefix can include a path. E.g., 'XZY' would give intermediate file named `XYZ:yyyy-mm-dd_hh`.

See p. 3-11, 3-18, and 3-36




Running ungrib

STEP 2: Link the correct Vtable to the file name “Vtable” in the run directory

- Some Vtables are provided with WPS in the **WPS/ungrib/Variable_Tables** directory
 - E.g., Vtable.GFS, Vtable.SST, Vtable.ECMWF
- Ungrib always expects to find a file named **vtable** in the run directory

See p. 3-

```
> In -s ungrib/Variable_Tables/Vtable.GFS Vtable
> ls Vtable
Vtable -> ungrib/Variable_Tables/Vtable.GFS
```



Running ungrib

STEP 3: Link GRIB files to the correct file names in the run directory

- Ungrib always expects GRIB files to be named GRIBFILE.AAA, GRIBFILE.AAB, GRIBFILE.AAC, etc., in the run directory
- The `link_grib.csh` script can be used to link GRIB files to these file names:

```
> link_grib.csh /data/GRIB/GFS/gfs*
```

See p. 3-12

```
> ls GRIBFILE.*
```

```
GRIBFILE.AAA -> /data/GRIB/GFS/gfs_060401_00_00
```




Running ungrib

STEP 4: Run ungrib.exe

```
*** Starting program ungrib.exe ***
Start_date = 2006-08-16_12:00:00 ,      End_date = 2006-08-16_12:00:00
output format is WPS
Path to intermediate files is ./
ungrib - grib edition num          2
```

```
#####
Inventory for date = 2006-08-16 12:00:00
```

PRES	TT	UU	VV	RH	HGT	
2013.0	O	O	O	O	O	O
2001.0	X	X	X	X	O	X
1000.0	X	X	X	X	X	
975.0	X	X	X	X	X	
950.0	X	X	X	X	X	
925.0	X	X	X	X	X	
900.0	X	X	X	X	X	



Running ungrib


STEP 5: Check that ungrib ran successfully

If ungrib ran successfully, this message should be printed:

```
!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!  
!   Successful completion of ungrib.           !  
!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!
```


If there was an error, check for error message in ungrib's printout or in the `ungrid.log` file.

Common errors are related to incorrect date specifications in the `&share` namelist, or because GRIB2 data was used with a version of WPS compiled without GRIB2 libraries.




Running ungrid

geo_em.d01.nc
geo_em.d02.nc
or
geo_nmm.d01.nc
geo_nmm_nest.l01.nc

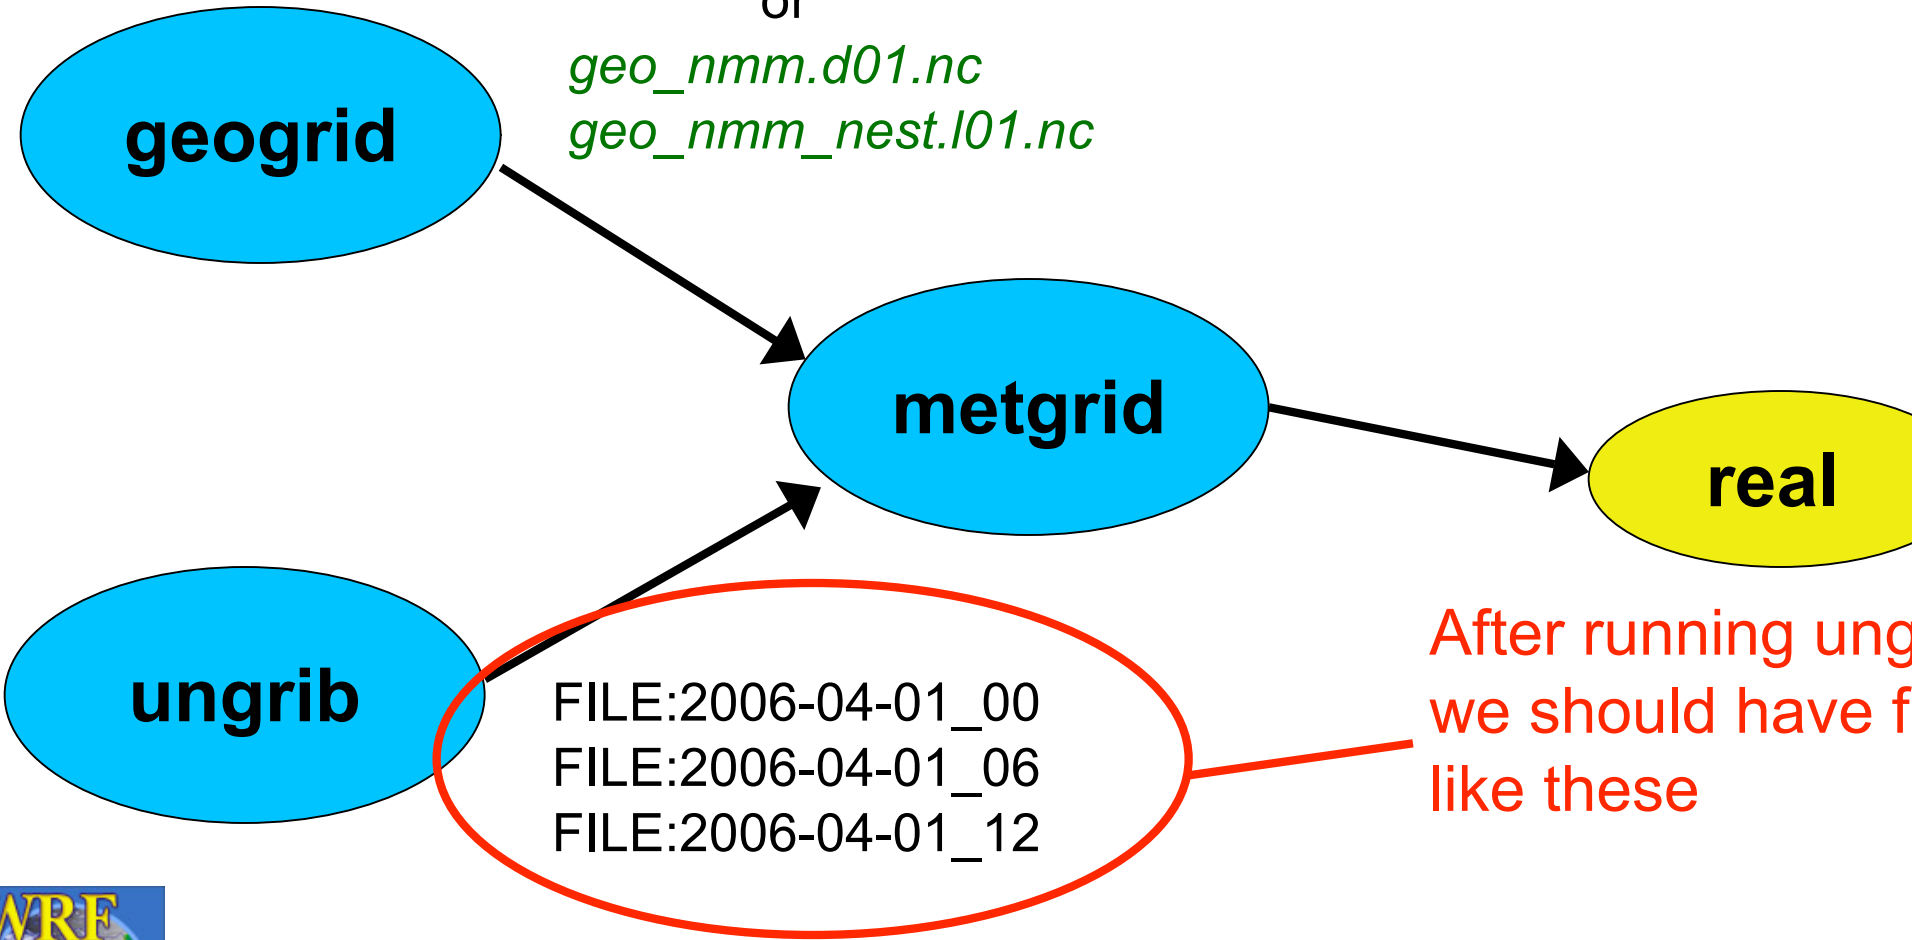

After running ungrid we should have files like these



Running metgrid

STEP 1: Edit `namelist.wps`

For metgrid, only the `&share` and `&metgrid` namelists need to be edited


`&share`

```
wrf_core = 'ARW',  
max_dom = 2,  
start_date = '2006-04-01_00:00:00', '2006-04-01_00:00:00',  
end_date = '2006-04-01_12:00:00', '2006-04-01_00:00:00',  
interval_seconds = 21600  
io_form_geogrid = 2,
```

`&metgrid`

```
fg_name = 'GFS',  
constants_name = 'SST:2006-04-01_00',  
io_form_metgrid = 2,
```

/



Running metgrid

STEP 1: Edit `namelist.wps`

&share


```
wrf_core = 'ARW',  
max_dom = 2,
```

```
start_date = '2006-04-01_00:00:00', '2006-04-01_00:00:00',  
end_date   = '2006-04-01_12:00:00', '2006-04-01_00:00:00',
```

```
interval_seconds = 21600  
io_form_geogrid = 2,
```

Data time range: Time range to process *for each domain*. Usually, only the initial time is needed for ARW nested domains. Only coarse domain needed for NMM.

See p. 3-14 and 3.



Running metgrid

STEP 1: Edit `namelist.wps`

Intermediate file prefixes: Prefix (or prefixes) of intermediate files to interpolate to model domain. Should match prefix given to ungrib.

See p. 3-

`&metgrid`

`fg_name = 'GFS',`

`constants_name = 'SST:2006-04-01_00',`


`io_form_metgrid = 2,`

`/`

Constant fields: Option name of an intermediate with fields to be used for every time period.

Metgrid I/O format: Which I/O format to use for metgrid output? 2=netCDF is recommended.

See p. 3-14, and 3-36




Running metgrid

STEP 2: Make sure METGRID.TBL is linked to the correct version of METGRID.TBL

- There are multiple METGRID.TBL files to support multiple dynamical cores in WRF
- Generally, METGRID.TBL.ARW must be used for ARW and METGRID.TBL.NMM for NMM

```
> ls metgrid/METGRID.TBL
```

```
METGRID.TBL -> METGRID.TBL.ARW
```




Running metgrid

STEP 3: Run metgrid.exe

```
Processing domain 1 of 2
  SST:2006-04-01_00
Processing 2006-04-01_00
  GFS
Processing 2006-04-01_06
  GFS
Processing 2006-04-01_12
  GFS
Processing domain 2 of 2
  SST:2006-04-01_00
Processing 2006-04-01_00
  GFS
!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!
! Successful completion of metgrid. !
!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!
```

Fields from constant files (give using constants_name) are processed before any time varying fields.

Metgrid processes all time period for one domain before processing for the next domain




Running metgrid

STEP 4: Check that metgrid ran successfully


If metgrid ran successfully, this message should be printed:

```
!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!
!  Successful completion of metgrid.                               !
!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!
```

If there was an error, check for an ERROR or WARNING message in the `metgrid.log` file, or for a system error, like “Segmentation fault”.




Running metgrid

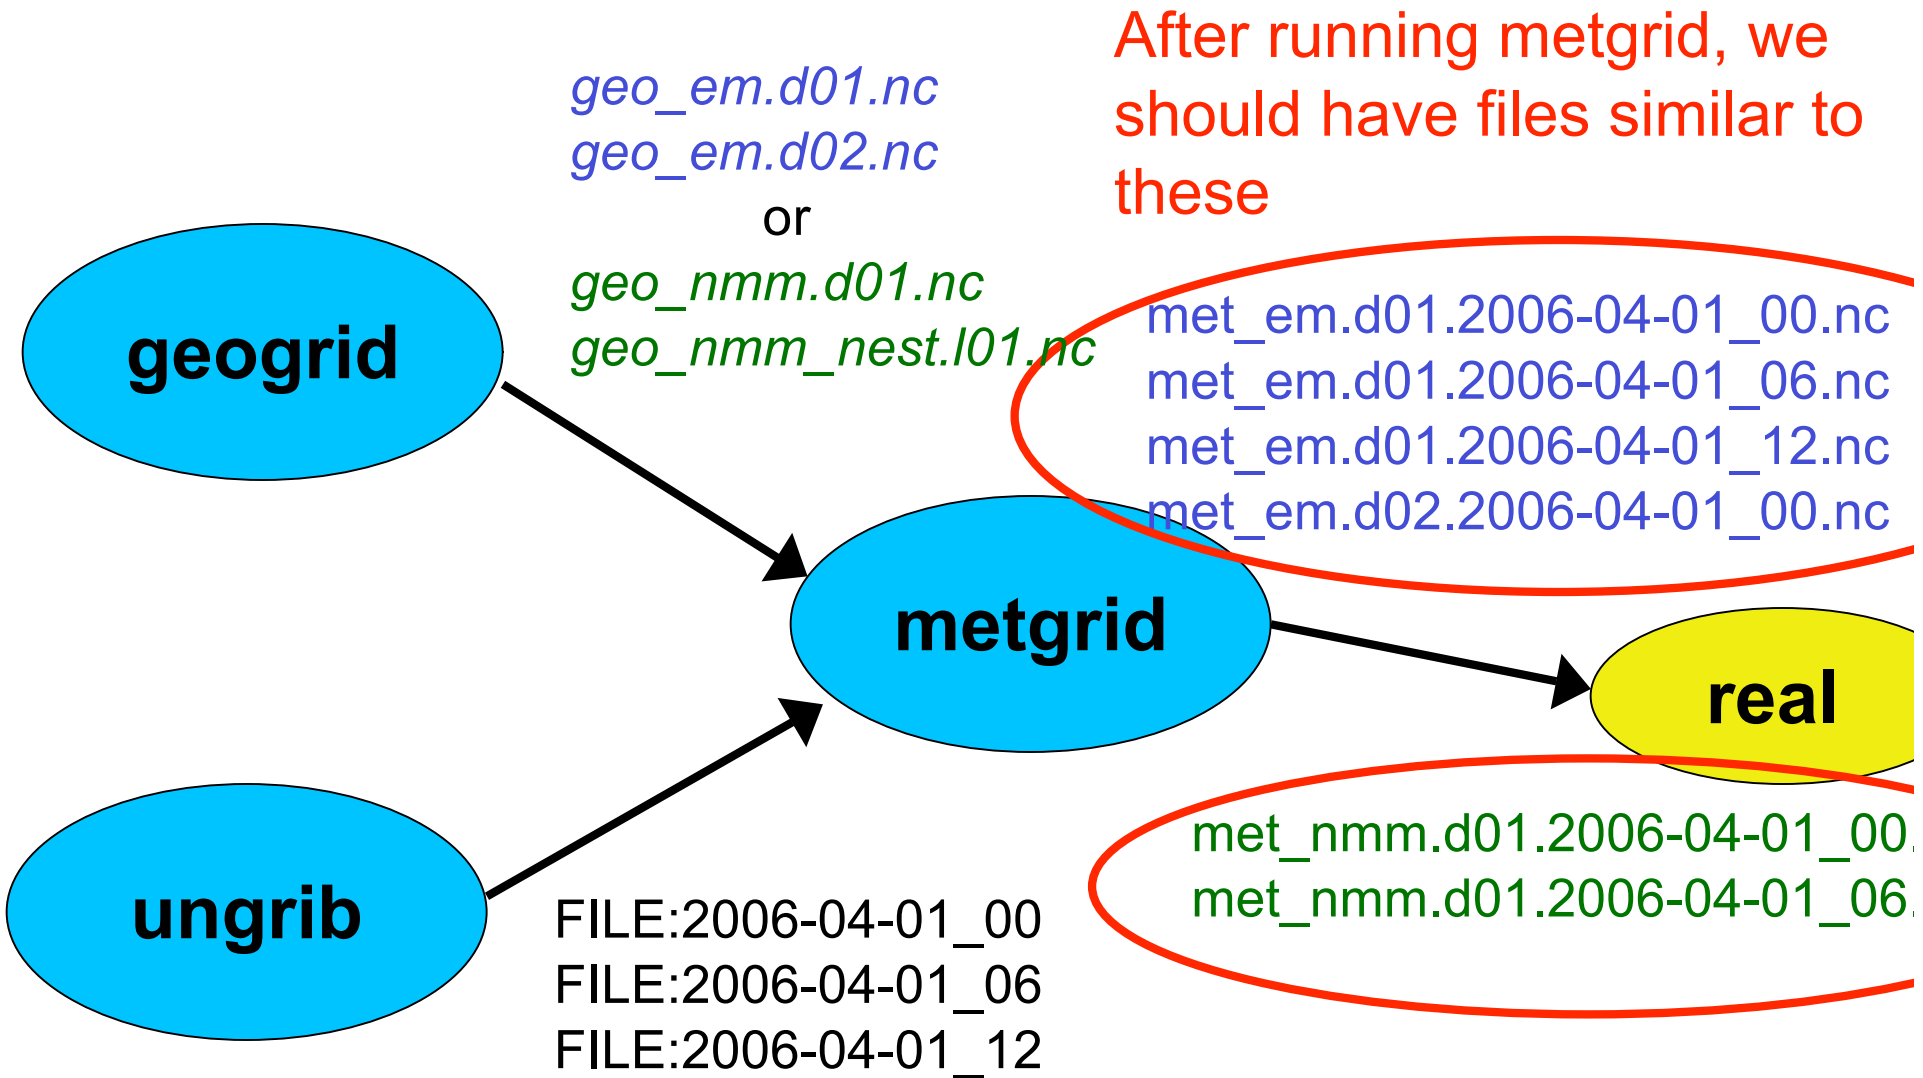

After running metgrid, we should have files similar to these


met_em.d01.2006-04-01_00.nc
met_em.d01.2006-04-01_06.nc
met_em.d01.2006-04-01_12.nc
met_em.d02.2006-04-01_00.nc

met_nmm.d01.2006-04-01_00.
met_nmm.d01.2006-04-01_06.



Overview


- How to run through the WPS for basic cases
 - Basic steps for running WPS
 - Geogrid
 - Ungrib
 - Metgrid
- WPS utility programs
- Common WPS mistakes



WPS Utility Programs

- Besides geogrid, ungrib, and metgrid, some simple utility programs are distributed with WPS:
 - For checking contents of intermediate format files
 - For listing contents of GRIB1 & GRIB2 files
 - To assist in locating domains
- Some programs use NCAR Graphics libraries for plotting
 - For these utilities, *NCAR Graphics must be installed*


See p. 3-22



WPS Utility Programs

The utility programs that come with WPS can be helpful when diagnosing problems with WPS output



- All utilities are found in the **WPS/uti1** directory
- Users are encouraged to make use of these utilities examine WPS input and output files



Utility: plotgrids

The *plotgrids* program plots the location of grids defined in *namelist.wps*

- *plotgrids* can be used to iteratively refine the locations of grids.
- *plotgrids* uses the *namelist.wps* file only, so there is no need to run *geogrid* first!

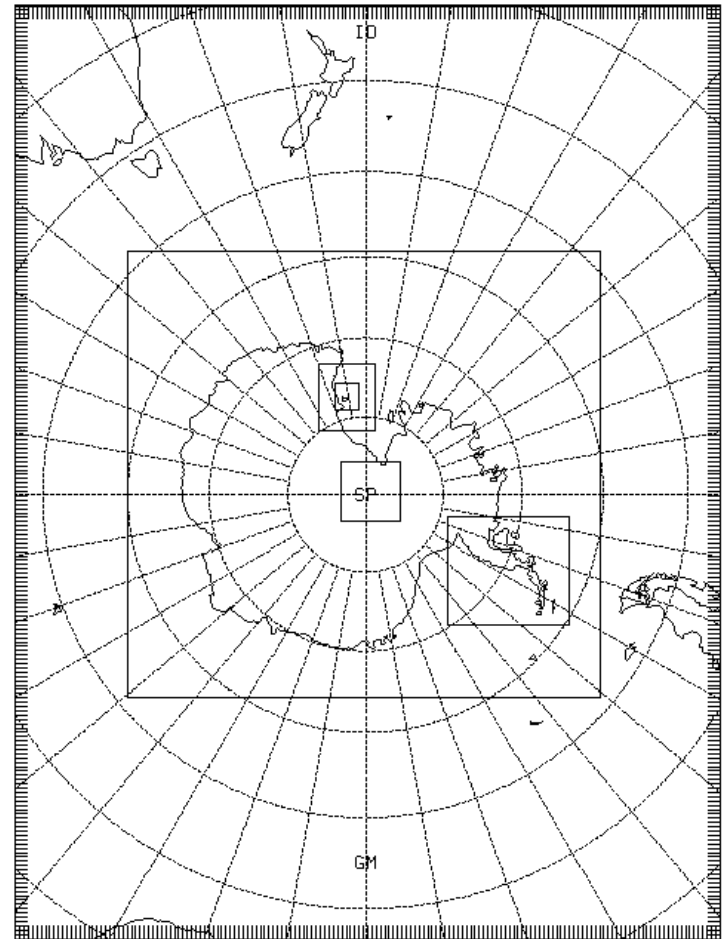

Utility: rd_intermediate


The rd_intermediate lists information about the fields found in an intermediate-format file

```
=====
FIELD = TT
UNITS = K DESCRIPTION = Temperature
DATE = 2000-01-24_12:00:00 FCST = 0.000000
SOURCE = unknown model from NCEP GRID 212
LEVEL = 200100.000000
I,J DIMS = 185, 129
IPROJ = 1
  REF_X, REF_Y = 1.000000, 1.000000
  REF_LAT, REF_LON = 12.190000, -133.459000
  DX, DY = 40.635250, 40.635250
  TRUELAT1 = 25.000002
DATA(1,1)=295.910950
=====
```



Utility: plotfmt

The plotfmt program plots the fields in the ungrib intermediate-formatted files

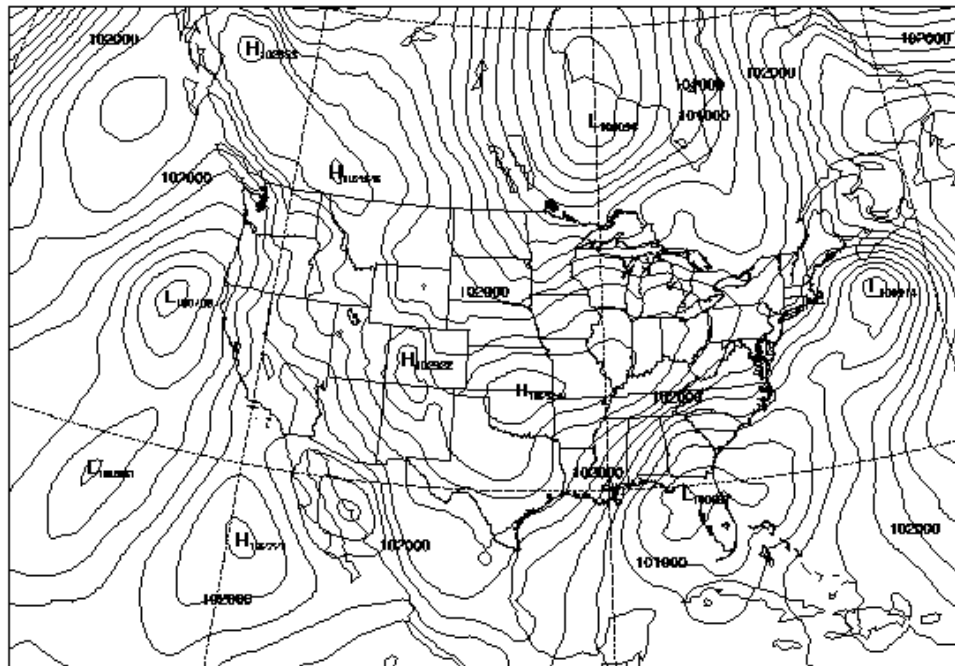


201300 PMSL

Pa
Sea-level Pressure
WPS intermediate format

CONTOUR FROM 100700 TO 103200 BY 200

unknown model from NCEP GRID 212

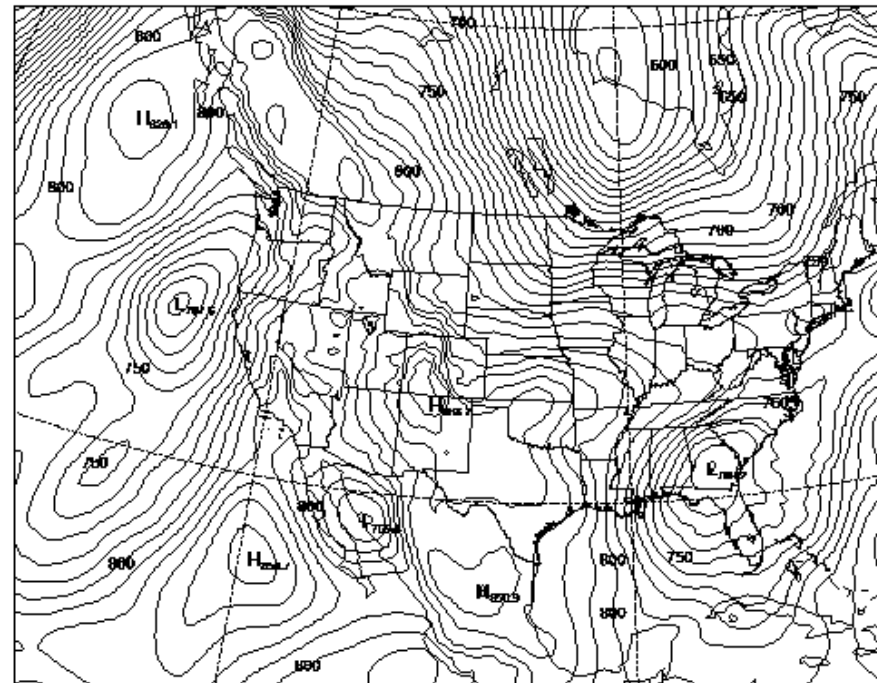


92500 GHT

m
Height
WPS intermediate format

CONTOUR FROM 580 TO


unknown model from NCE



Utility: g1print and g2print


The *g1print* and *g2print* programs list the contents of a GRIB1 or GRIB2 file:

rec num	Prod Disc	Cat	Param num	Lvl code	Lvl one	Lvl two	Name	Time	Fcs hou
1	0	3	5	100	100000	0	HGT	2006-08-16_12:00:00	0
2	0	3	5	100	97500	0	HGT	2006-08-16_12:00:00	0
3	0	3	5	100	95000	0	HGT	2006-08-16_12:00:00	0
4	0	3	5	100	92500	0	HGT	2006-08-16_12:00:00	0
5	0	3	5	100	90000	0	HGT	2006-08-16_12:00:00	0
6	0	3	5	100	85000	0	HGT	2006-08-16_12:00:00	0
7	0	3	5	100	80000	0	HGT	2006-08-16_12:00:00	0
8	0	3	5	100	75000	0	HGT	2006-08-16_12:00:00	0
9	0	3	5	100	70000	0	HGT	2006-08-16_12:00:00	0
10	0	3	5	100	65000	0	HGT	2006-08-16_12:00:00	0



Overview

- How to run through the WPS for basic cases
 - Basic steps for running WPS
 - Geogrid
 - Ungrib
 - Metgrid
- WPS utility programs
- Common WPS mistakes




Common WPS Mistakes

- 1) All 3-d fields must have same number of levels in metgrid

```
WRF_DEBUG: Warning DIM              4 , NAME
num_metgrid_levels REDefined by var GHT          27
26 in wrf_io.F90 line              2347
ERROR: Error in ext_pkg_write_field
```

- This is usually corrected by ensuring that all 3-d meteorological fields have surface level data
- Try setting debug_level=1000 in &share namelist, and checking metgrid.log for a table showing which fields are on which levels



Common WPS Mistakes

- 2) When using a regional data set (e.g., NAM), ensure that model domain is completely covered by the data
 - The metgrid program will stop if the model domain has grid points that are not covered by data

- 3) For native vertical coordinate data sets (e.g., RUCb, ECMWF), ensure that both pressure and geopotential height fields are available

